



## Power Type

## PT Series

### Features

- Quick charge & discharge
- Environmentally friendly products
- Extended temperature to 105°C
- Humidity resistance @ RH90% 65°C
- Compliant with key AEC-Q200 tests

### Certification

- RoHS & REACH compliant

### Recommended Applications


- Pulse power demand
- High temperature demand




### Specification

Items	Characteristics	
Rated Voltage	2.3 V	2.5 V
Operating Temp. (Charge)	-40°C ~ 105°C	-40°C ~ 85°C
Surge Voltage	2.7 V	
Capacitance Tolerance	-20% ~ +20% of Rated Capacitance	
Test	Endurance	Standards
High Temp. Life	1000hrs @ Rated Voltage & Max. Operating Temp.	Must to meet standards as below after test: CAP decline < 30% of Initial measurement. ESR < 2 times specification value.
Shelf Life	After 2 years at 25°C without load, the capacitor shall meet the specified endurance limits.	
Life time	10 Years @ Rated Voltage & 25°C	
Cycle Life	500,000 Cycles @ 25°C (Operating Between 50%~100% Of Rated Voltage)	

### Dimensions

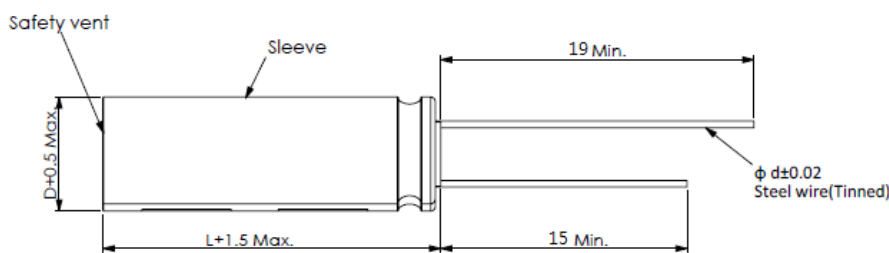

D	L	d	F
10	30	0.6	5.0

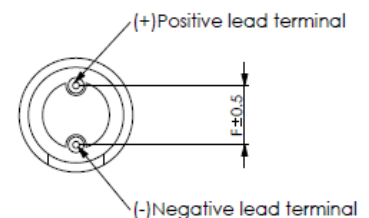

### Standard Ratings

Rated Cap (F)	Size (mm)	Max. Internal Resistance (mΩ)		Max. LC (mA)	Stored Energy (Wh)	Specific Energy (Wh/kg)		Specific Power (W/kg)		Max. Peak Current 1s to 1/2V (A)	Max. continuous current (A)	ISC (A)	Max. Weight (g)	Part Number
		AC (1kHz,1V)	DC			72hrs, 25°C	(Wh/l)	Pd	Pmax					
measure at 25°C	ΦDXL													
10	10X30	60	120	0.048	0.0073	1.8368	3.1183	1323	2755	5.227	1.00	19.17	4	PT2R3106M1030

